






Fast Track
Looselay tile

FAST TRACK LOOSELAY TILE

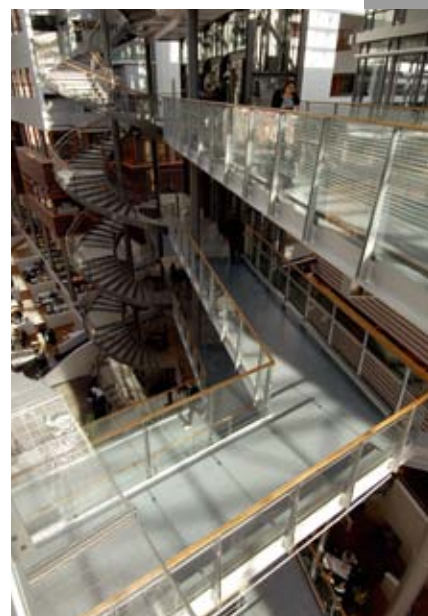

FAST TRACK LOOSELAY TILE



Design



**Glued
Difficult to lay
Subfloor preparation**


Technical




Sticked Tiles

Removable Tiles

Sticked Tiles

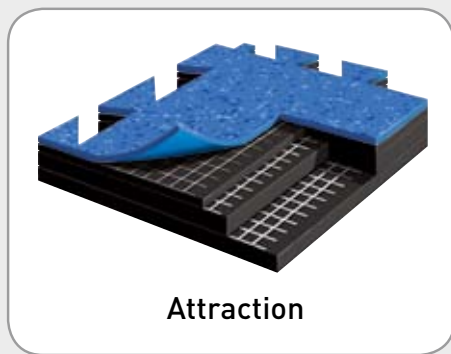

Not glued
Easy to lay
No subfloor preparation

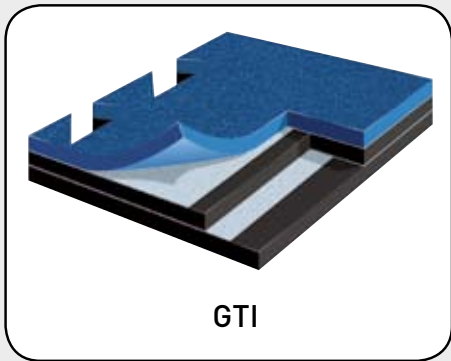

Looselay Tiles

**FAST TRACK
LOOSE LAY TILES
116 - 139**

Creation Clic System 120
- Wood 122

Attraction® 126

GTI 130
- GTI 133
- GTI AS Decor 133

Saga² 134

Fast Track
Looselay tile

FAST TRACK LOOSELAY TILE

CREATION CLIC SYSTEM

▶ CREATION CLIC SYSTEM




CREATION CLIC SYSTEM is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering, available in planks 17.2 x 100cm with beveled edges

It consists of a transparent wear layer 0.7mm thick, a design film, a compact reinforced underlayer. They are compressed and grained at high pressure.

It benefits from polyurethane surface treatment PUR making maintenance easier and eliminating the need for initial polishes.

The overall thickness is 6mm.

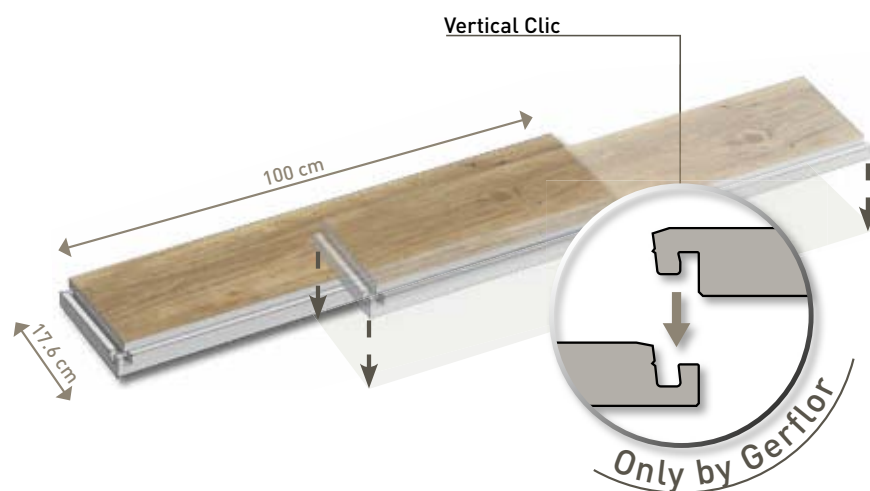

CREATION CLIC SYSTEM



PUR



100% recyclable

► The one installation solution

- Interlocking planks that can be laid without adhesive, with the benefit of easier installation and removal
- Rapid installation system by vertical clipping > simplified finishing (angles, pillar surrounds, etc...)
- Easy replacement of individual planks when required
- No need to close the premises, so no loss of revenue
- Minimum sub-floor preparation
- Installation also possible on existing floor coverings.

CREATION CLIC SYSTEM

DESCRIPTION

Total thickness	EN 428	mm	6
Thickness of wearlayer	EN 429	mm	0.70
Weight	EN 430	g/m ²	9895
Tile size	EN 427	cm	17.6 X 100

CLASSIFICATION

Norm / Product specification	-	-	EN 649
European classification	EN 685	class	34-43
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet : ramp test with oil	DIN 51 130	class	R9

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	EN 649 / EN 651	group	T
Dimensional stability	EN 434	%	≤ 0.15
Residual indentation	EN 433	mm	0.10
Sound Insulation	EN ISO 712-2	dB	6
Thermal conductivity	EN 12 524	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Chemical products resistance	EN 423	-	OK
Surface treatment	-	-	PUR

CE MARKING

CE	EN 14041	

FAST TRACK LOOSELAY TILE

CREATION CLIC SYSTEM



CREATION CLIC SYSTEM



PUR



100% recyclable



0265 Walnut



0359 Wild Oak



0360 Deep Forest



0356 Denim Wood



0357 Portobello



0358 Moon Island

- All the Creation Wood references are available upon request except the references below :
Antique Wenge, Antique Mahogany, Washed Wood, Golden Rustic, Drift Wood
- Minimum quantity : 1000m²/order
- Delivery time : contact your Gerflor customer service

FAST TRACK LOOSELAY TILE

CREATION CLIC SYSTEM



CREATION CLIC SYSTEM



0272 Sorb



0337 Victoria Oak



0335 Sycamore



0258 Muir Oak



0260 Classic Oak




0262 Elm

- All the Creation Wood references are available upon request except the references below :
Antique Wenge, Antique Mahogany, Washed Wood, Golden Rustic, Drift Wood
- Minimum quantity : 1000m²/order
- Delivery time : contact your Gerflor customer service

FAST TRACK LOOSELAY TILE

ATTRACTION®

▶ ATTRACTION

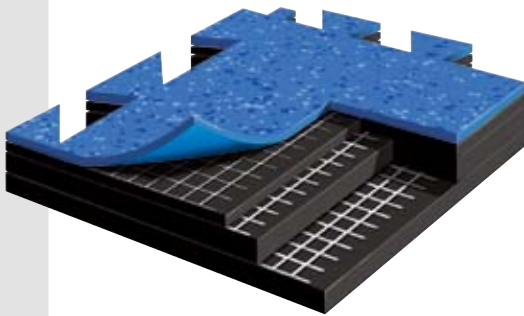

ATTRACTION® is a semi-flexible tile constructed by compacting at high temperature a 4mm recycled backing and a 1mm pure Vinyl coloured wearlayer.

The unique flecked design is produced through the high pressure introduction of coloured chips to the coloured wearlayer.

It has a unique dovetail joint which allows rapid loose lay installation and replacement.

To improve maintenance a UV cured polyurethane (PUR) treatment is applied to the textured surface. This facilitates ease of maintenance and eliminates the use of acrylic emulsion (polish) for a period dependant on maintenance regime and traffic levels.

It is anti-static (< 2 kV) and meets the requirements for use in computer rooms. It benefits from Sanosol®, a fungistatic and bacteriostatic treatment.

It has a Bfl-s1 fire classification in accordance with standard EN 13501-1.

ATTRACTION®

 Compact	Removable	R9	PUR	Sanosol®	 100% recyclable
---	------------------	-----------	------------	-----------------	---

- ▶ Fast track and easy installation with interlocking edges
- ▶ No immobilisation of the premises and no loss of turnover
- ▶ Little or no subfloor preparation
- ▶ Low maintenance cost: UV cured polyurethane (PUR) treatment
- ▶ Unlimited design options: 16 colours

ATTRACTION®

DESCRIPTION

Total thickness	EN 428	mm	5
Thickness of wearlayer	EN 429	mm	1
Weight	EN 430	g/m ²	7420
Tile size	EN 427	cm	635 x 635

CLASSIFICATION

Norm / Product specification	-	-	EN 649
European classification	EN 685	class	34-43
Fire rating	EN 13501-1	class	C _{fl} -s1 (Looselay installation) B _{fl} -s1 (Permanent installation)
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet : ramp test with oil	DIN 51 130	class	R9

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	EN 649 / EN 651	group	T
Dimensional stability	EN 434	%	≤ 0.25
Residual indentation	EN 433	mm	≤ 0.10
Impact sound Insulation	EN ISO 712-2	dB	4
Thermal conductivity	EN 12 524	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Chemical products resistance	EN 423	-	OK
Fungistatic & bacteriostatic treatment	-	-	Sanosol®
Surface treatment	-	-	PUR

CE MARKING

	EN 14041	  
		 


FAST TRACK LOOSELAY TILE

ATTRACTION®




ATTRACTION®

 Compact	Removable	R9	PUR	Sanosol®	 100% recyclable
---	------------------	-----------	------------	-----------------	---




0275 Tiare



0276 Lotus




0292 Flora




0283 Campanule




0293 Waterlily



0290 Amaryllis




0279 Daisy




0284 Sunflower




0294 Bougainvillea




0291 Aurarae



0280 Coccinea



0281 Gerbera



0277 Orchid



0278 Heliconia



0287 Olivia



0285 Poppy


For further details, please refer to the Attraction® brochure.

FAST TRACK LOOSELAY TILE

GTI - GTI AS DECOR

▶ GTI - GTI AS DECOR

GTI

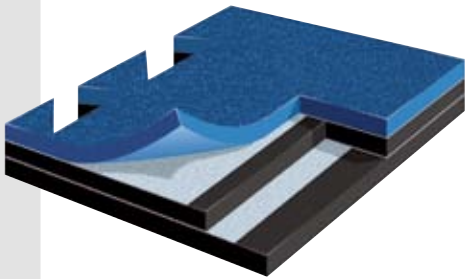

GTI is a multilayered interlocking looselay vinyl tile with polyurethane treatment (PUR), 6 mm thick with a dovetail joint, abrasion group T (K5 wear rating), manufactured by Gerflor using a continuous high pressure process.


GTI is reinforced with 2 glass fibre grids on either side of an intermediate pressed homogeneous layer. GTI's backing is a 2 mm thick black pressed homogeneous sheet, its surface is a coloured diamond studded homogeneous sheet 2 mm thick.

GTI AS Decor is antistatic and offers a polychrome diamond studded surface.


GTI Access is a ramp that provides continuity between the tile and the existing floor.

GTI Corner enables covering of inaccessible corners or finishing central patterns.


GTI AS DECOR

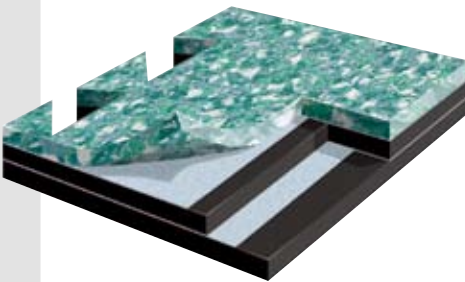

GTI Access
635 x 350 mm

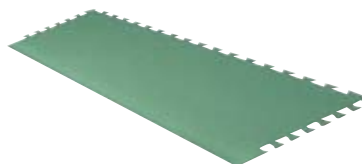

GTI Corner
350 x 350 mm



GTI logo



0001 Caution



0004 Stop



0003 Arrow



0002 Forklift



0005 No entry








0006 Pedestrian

GTI - GTI AS DECOR

 Compact	Removable	R10	PUR	 100% recyclable
---	------------------	------------	------------	---

- ▶ Resistant to heavy traffic in industrial areas
- ▶ Easy to lay with interlocking edges
- ▶ Polyurethane surface treatment (PUR) for ease of maintenance
- ▶ 6 Standard logos for enhanced floor markings
- ▶ GTI AS Decor is antistatic

			GTI AS DECOR	GTI
DESCRIPTION				
Total thickness	EN 428	mm	6	6
Thickness of wearlayer	EN 429	mm	2	2
Weight	EN 430	g/m ²	9220	9080
Tile size	EN 427	mm	635 x 635	635 x 635
CLASSIFICATION				
Norm / Product specification	-	-	EN 649	EN 649
European classification	EN 685	class	34-43	34-43
K rating	-	class	K5	K5
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet: ramp test with oil	DIN 51 130	class	R10	R10
PERFORMANCES				
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0
Wear group	EN 649	group	T	T
Dimensional stability	EN 434	%	≤ 0.25	≤ 0.25
Shore hardness A	EN ISO 868	H _D	94	94
Thermal conductivity	EN 12 524	W/(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Chemical products resistance	EN 423	-	OK	OK
Surface treatment	-	-	PUR	PUR
CE MARKING				
	EN 14041	  		
				

FAST TRACK LOOSELAY TILE


GTI - GTI AS DECOR



GTI - GTI AS DECOR

 Compact	Removable	R10	PUR	 100% recyclable
---	------------------	------------	------------	---

GTI



0512 Gris clair



0850 Rouge




0200 Jaune



0137 Vert



0630 Gris



0690 Noir



0800 Bleu

GTI AS DECOR



0042 Sodium



0050 Nickel



0036 Cobalt




0059 Steel

FAST TRACK LOOSELAY TILE

SAGA²

▶ SAGA²

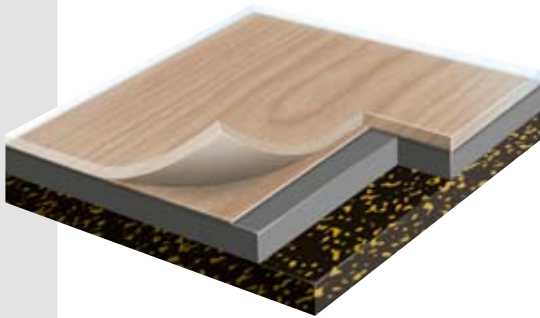

The flooring selected is a noise reducing, decorative, group T, Vinyl flooring, available in 50 x 50 cm tiles.

It is made up of a transparent 0.7 mm thick surface layer with a decorative film, a calendered inner layer and a Vinyl / Cork sublayer.



It has a ProtecSol® (polyurethane) treated surface for easier maintenance. It benefits from Sanosol®, fungistatic and bacteriostatic treatment. The total thickness of the tile is 4.6 mm.

SAGA² tiles are 100% recyclable.

 Comfort	Removable	15dB	Protocolsol[®]	Sanosol[®]	 100% recyclable
---	------------------	-------------	--------------------------------	----------------------------	---

► Fast track loose lay tiles suitable for heavy traffic areas: offices , shops, public areas...

- Reusable
- Protocolsol[®] surface treatment: easy to maintain
- Ideal for use alongside carpet tiles

				SAGA ²
DESCRIPTION				
Total thickness	EN 428	mm	4.6	
Thickness of wearlayer	EN 429	mm	0.70	
Weight	EN 430	g/m ²	5595	
Tile size	EN 427	cm	500 X 500	
CLASSIFICATION				
Norm / Product specification	-	-	EN 652	
European classification	EN 685	class	34-42	
Fire rating	EN 13501-1	class	Bfl-s1	
Static electrical propensity	EN 1815	kV	< 2	
Slip resistance wet	DIN 51130	clase	R10	
PERFORMANCE				
Wear resistance	EN 660.2	mm ³	≤ 2.0	
Wear group	EN 649 / EN 651	group	T	
Dimensional stability	EN 434	%	≤ 0.15	
Residual indentation	EN 433	mm	≤ 0.18	
Impact sound insulation	EN ISO 712-2	dB	15	
Thermal conductivity	EN 12 524	W/(m.k)	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	
Chemical products resistance	EN 423	-	OK	
Fungistatic & bacteriostatic treatment	-	-	Sanosol [®]	
Surface treatment	-	-	Protocolsol [®]	
CE MARKING				
CE	EN 14041			
				

Please contact Gerflor's Technical department for advice regarding the access flooring installations, particularly where there is concern over potential telegraphing.


FAST TRACK LOOSELAY TILE

SAGA²




SAGA²


 Comfort	Removable	15dB	Protocols[®]	Sanosol[®]	 100% recyclable
---	------------------	-------------	------------------------------	----------------------------	---



0012 Silver Oak



0001 Diva Dark Grey




0015 Concrete



0010 Stripe Wood




0019 Kadina Ice*



0021 Barma Sweet



0011 Dark Oak



0002 Diva Grey




0014 Urban Stone



0023 Barma Mystery



0017 Kadina City*



0013 Classic Stone


* product availability : please contact Gerflor

FAST TRACK LOOSELAY TILE


SAGA²




 Compact	Removable	15dB	Protecsol®	Sanosol®	 100% recyclable
---	------------------	-------------	-------------------	-----------------	---



0004 Diva White



0020 Barma Lagoon



0003 Diva Blue



0016 Kadina Soft*



0006 Opalon Light



0007 Natural Beech



0024 Barma Pure



0008 Honey Beech




0009 Nordica Beech



0018 Kadina Nature*



0022 Barma Cosy



0005 Opalon Medium

* product availability : please contact Gerflor